




LP | LF

*Innovation and
performance in Laser
cutting solutions*






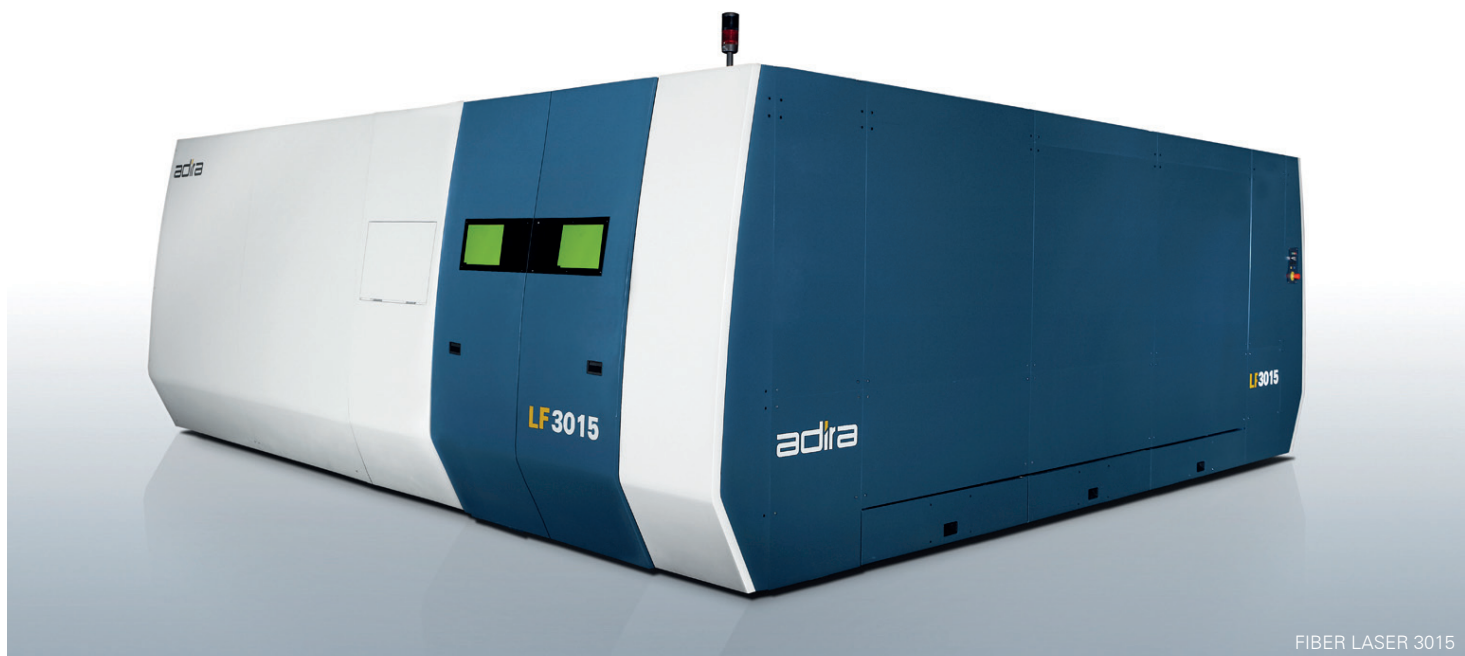

FIBER LASER 3015

Model		LP 3015 / LF 3015	LP 4020 / LF 4020	LP 6020 / LF 6020
Max. plate dimension	mm	3000x 1500	4000 x 2000	6000 x 2000
Travel X	mm	3050	4050	6050
Travel Y	mm	1525	2025	2025
Travel Z	mm	125	125	125
Positioning speed in X	m/min	150/200	150/200	150/200
Positioning speed in Y	m/min	150/200	150/200	150/200
Simultaneous positioning speed in X,Y	m/min	210/280	210/280	210/280
Positioning speed in Z	m/min	120	120	120
Max. acceleration	G	Better than 1,3 / 2,2	Better than 1,3 / 2,2	Better than 1,3 / 2,2
Repeatability	mm	Better than $\pm 0,02$	Better than $\pm 0,02$	Better than $\pm 0,02$
Positioning accuracy	mm	Better than $\pm 0,05$	Better than $\pm 0,05$	Better than $\pm 0,05$
Standard dimensions (L x W x H)	mm	9900 x 6000 x 2100 (*)	12000 x 6600 x 2100 (*)	17000 x 6600 x 2100 (*)
Approx. weight	Kg	20000	27000	35000

All data are approximate. Specifications are subject to change without notice. Shown specifications may vary from country to country. For different configurations consult your Adira specialist.

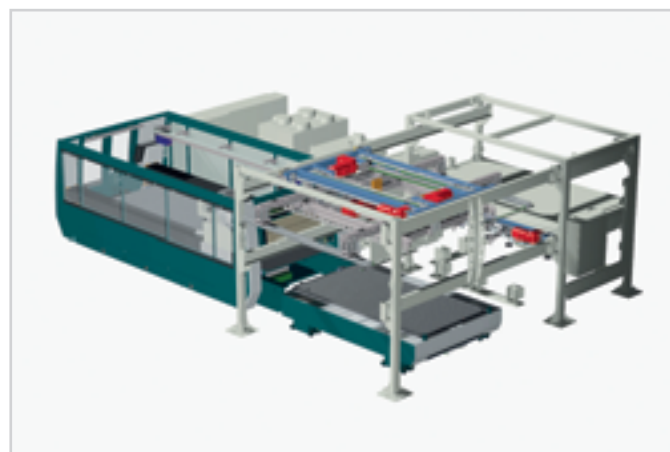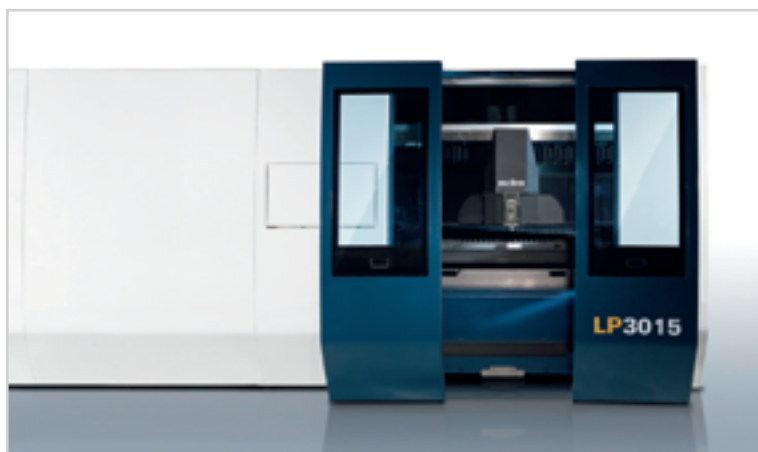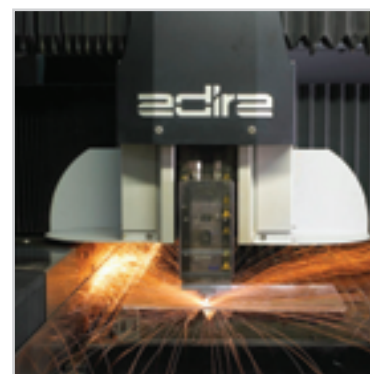

ADIRA

Rua António Bessa Leite, 976/1106
4150-072 Porto > PORTUGAL
Telf. + 351 22 619 27 00
Fax. + 351 22 619 27 01
E-mail: adira@adira.pt > www.adira.pt



DC/MAP-C-149-I-12/10